




Diameter  
φ 12.5~54.0mm

IT11~  
IT class

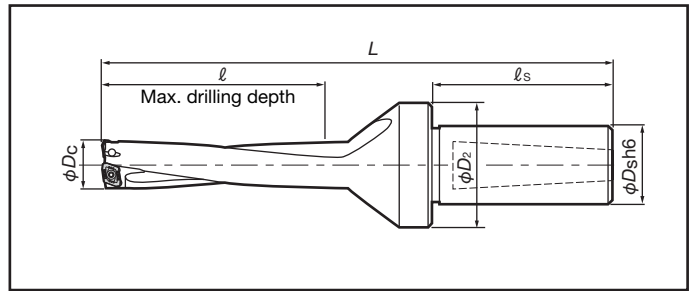

**For L/D=4**

Dia. φD <sub>c</sub>	Cat. No.	Stock	Dimensions (mm)					Applicable inserts	Max. offset	Clamping screw	Torx wrench	Hex. wrench	Plug screw								
			φD <sub>s</sub>	φD <sub>2</sub>	ℓ	ℓ <sub>s</sub>	L														
12.5	TDX125L050W20-4	●	20	32	50	43	116	XPMT040104R-DJ XPMT040104R-DS XPMT040104R-DW	0.8	CSTB-2	T-6D										
13.0	TDX130L052W20-4	●			52		118		0.7												
13.5	TDX135L054W20-4	●			54		121		0.5												
14.0	TDX140L056W20-4	●			56		123		0.4												
14.5	TDX145L058W20-4	●			58		125		0.3												
15.0	TDX150L060W20-4	●			60		128		0.9												
15.5	TDX155L062W20-4	●			62		130		0.8												
16.0	TDX160L064W20-4	●			64		132		0.6												
16.5	TDX165L066W20-4	●			66		135		0.5												
17.0	TDX170L068W20-4	●			68		137		0.4												
17.5	TDX175L070W25-4	●	25	37	70	50	XPMT06X308R-DJ XPMT06X308R-DS XPMT06X308R-DW	1.2	CSTB-2.2R	T-7D											
18.0	TDX180L072W25-4	●			72			150					1.1								
18.5	TDX185L074W25-4	●			74			152					0.9								
19.0	TDX190L076W25-4	●			76			154					0.8								
19.5	TDX195L078W25-4	●			78			157					0.7								
20.0	TDX200L080W25-4	●			80			160					0.5								
20.5	TDX205L082W25-4	●			82			162					0.4								
21.0	TDX210L084W25-4	●			84			164					0.3								
21.5	TDX215L086W25-4	●			86			166					0.2								
22.0	TDX220L088W25-4	●			88			169					1.2								
22.5	TDX225L090W25-4	●	90	171	1.1																
23.0	TDX230L092W25-4	●	92	173	0.9																
23.5	TDX235L094W25-4	●	94	175	0.8																
24.0	TDX240L096W25-4	●	96	178	0.7																
24.5	TDX245L098W25-4	●	98	181	0.5																
25.0	TDX250L100W25-4	●	100	183	0.4																
25.5	TDX255L102W25-4	●	102	185	0.3																
26.0	TDX260L104W25-4	●	104	187	0.2																
27.0	TDX270L108W32-4	●	32	40	108	55	XPMT08T308R-DJ XPMT08T308R-DS XPMT08T308R-DW	1.5	CSTB-3	T-9D											
28.0	TDX280L112W32-4	●			112			203					1.2								
29.0	TDX290L116W32-4	●			116			208					1.0								
30.0	TDX300L120W32-4	●			120			213					0.7								
31.0	TDX310L124W32-4	●			124			217					0.4								
32.0	TDX320L128W32-4	●			128			222					0.2								
33.0	TDX330L132W40-4	●			40			50					132	65	XPMT110412R-DJ XPMT110412R-DS XPMT110412R-DW	2.3	CSTB-4	T-15D			
34.0	TDX340L136W40-4	●											136			243					2.1
35.0	TDX350L140W40-4	●											140			248					1.8
36.0	TDX360L144W40-4	●											144			252					1.5
37.0	TDX370L148W40-4	●	148	258		1.3															
38.0	TDX380L152W40-4	●	152	262		1.0															
39.0	TDX390L156W40-4	●	156	267		0.7															
40.0	TDX400L160W40-4	●	160	272		0.5															
41.0	TDX410L164W40-4	●	164	277		0.2															
42.0	TDX420L168W40-4	●	55	188		168	306		XPMT150512R-DJ XPMT150512R-DS XPMT150512R-DW	3.1	CSTB-5	T-20D									
43.0	TDX430L172W40-4	●			172	287		2.9													
44.0	TDX440L176W40-4	●			176	292		2.6													
45.0	TDX450L180W40-4	●			180	296		2.3													
46.0	TDX460L184W40-4	●			184	302		2.1													
47.0	TDX470L188W40-4	●			188	306		1.8													
48.0	TDX480L192W40-4	●			192	311		1.5													
49.0	TDX490L196W40-4	●			196	316		1.3													
50.0	TDX500L200W40-4	●			200	320		1.0													
51.0	TDX510L204W40-4	●			204	325		0.7													
52.0	TDX520L208W40-4	●	208	330	0.5																
53.0	TDX530L212W40-4	●	212	335	—																
54.0	TDX540L216W40-4	●	216	339	—																

Note: L/D=Hole depth/Drill diameter

● : Stocked in Japan.